




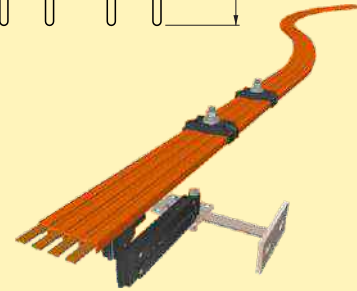


### FEATURES

- Quick & easy Installation.
- Tapeform copper conductor ( without joints )
- Minimum volt drop due to continuous copper conductor
- No expansion problems.The housing & tapeform conductors can expand. contract freely during temperature changes.
- Touch proof design .
- Indoor & Outdoor installation.

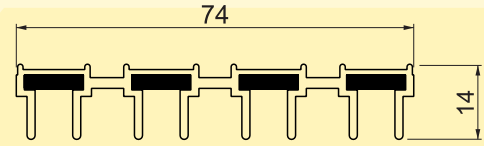

### COMPATIBLE CURRENT COLLECTOR

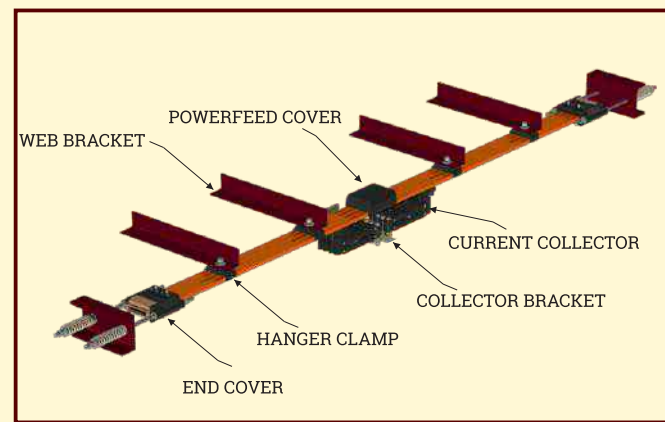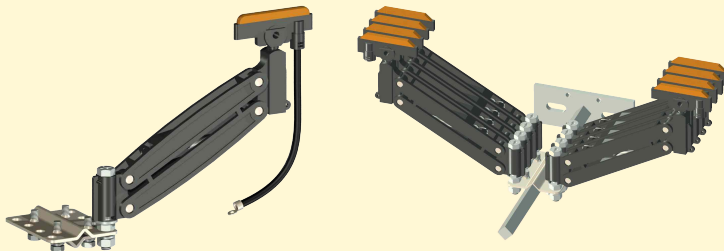

### TECHNICAL DATA SAFELINE-U (JOINTLESS TAPEFORM SHROUDED DSL)

Conductor Bar System	Copper (Tapeform)		
Type	UJ-50	UJ-80	UJ-100
Nominal Current (A) at 100% Duty and 35°C	50	80	100
DC Resistance (Ω/KM) at + 35°C	0.0019	0.0008	0.0005
Impedence (Ω/KM) At 50mm bar spacing and + 35°C	0.0021	0.0009	0.0006
Voltage grade [V]	1000		
Support Spacing [mm]	For Straight Path 1000/500 For Curved Path		
Bar Type	Tape Form		
Outside Dimension [mm]	74 x 14		
Traveling speed [m/m]	600 max		

### SYSTEM ARRANGEMENT FOR SAFELINE - U (40-140AMPS.)

