




INDUSTRIAL BRAKES SDM 500-80/06

TECHNICAL DATA

ITEM	BRAKE	THRUSTER
MODEL	SDM 500-80/06	ELDY - 80/06
DRUM DIA	500 mm	-----
SHOE WIDTH	180 MM	-----
BRAKE SHOE	Aluminum + Asbestos free Liner	-----
FRICTION COEFFICIENT	μ 0.42	-----
BRAKING TORQUE	220 Kg-m - 2200 Nm	-----
THRUST	-----	80 Kg
STROKE	-----	60 mm
OIL + CAPACITY	-----	Transformer Oil IS - 335 (5 Liters)
RATED VOLTAGE	-----	415 V $\pm$ 10% 50 Hz 3Ph AC
CURRENT	-----	0.9 Amps ($\pm$ 10%)
INSULATION	-----	F Class
INGRESS PROTECTION	-----	IP - 65 IS/IEC 60529 (2001)
AMBIENT TEMP	-----	50° C
POWER	-----	360 Watt
WEIGHT	134 Kg	24 Kg

LWC	LINING WEAR COMPENSATOR
LWI	LINING WEAR INDICATOR
HRL	HAND RELEASE LEVER
LWLS	LINING WEAR LIMIT SWITCH
BRLS	BRAKE RELEASE LIMIT SWITCH
BELS	BRAKE ENGAGING LIMIT SWITCH
SS	STAINLESS STEEL PINS
LUB	LUBRICATORS ON MAIN PINS
SV	SPECIAL VOLTAGE
SPA	PAINT ACCORDING TO CUSTOMER SPECIFICATION

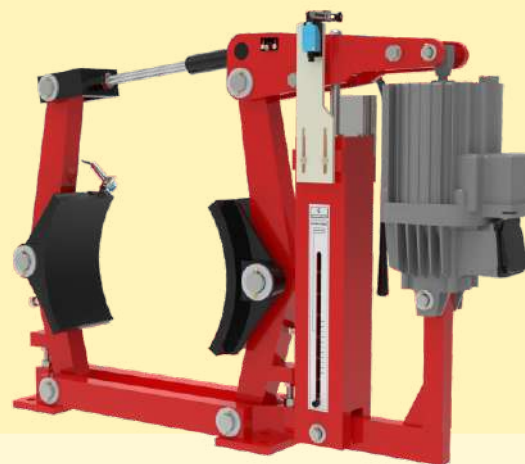

SELECTION OF BRAKE SIZE

SDM Thruster brakes are steel fabricated frames with Eldy Thruster as per din standard.


Excellent designs & good manufacturing process ensure a reliable product.

The brake torque must be $\geq$ than motor full load as referred with drum. Formula as below:


$$T = \text{Torque in Kgm} = \frac{716 \times \text{Hp}}{\text{rpm}}$$

$$T = \text{Torque in Nm} = \frac{9552 \times \text{Kw}}{\text{rpm}}$$

Where Hp/Kw = motor output & rpm = Rev/minute

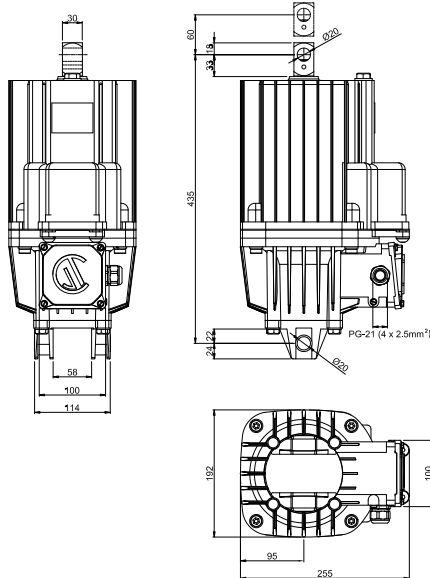

ELDY 80-06

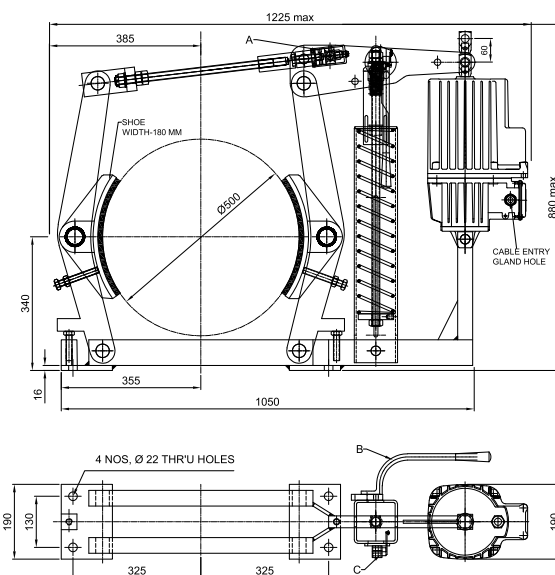

SDM-500-80/06

H. O. Unit - I : C-15/16, Nand Jyot
Industrial Estate, Andheri-Kurla
Road, Mumbai - 400072,
Tel : (022) 42469700/730
E-mail : sales@socgroup.in

Unit - II: Plot No. 4912, G. I. D. C.,
Phase IV, Vatva,
Ahmedabad - 382445
Tel.: (079) 68169700/702/712
E-mail : enquiry2@socgroup.in

Visit us at :
www.speedocontrols.com
www.socremote.com
www.socjoystick.com

**SPEED-O-CONTROLS
PVT. LTD.**
CRANE CONTROL GEAR V6