


Thruster Brake Eldy SMG (500-80/06)STD



TECHNICAL DATA

ITEM	BRAKE	THRUSTER
MODEL	SMG 500-80/06 STD	ELDY - 80/06
DRUM DIA	500 mm	-----
SHOE WIDTH	180 MM	-----
BRAKE SHOE	Aluminum + Asbestos free Liner	-----
FRICTION COEFFICIENT	μ 0.42	-----
BRAKING TORQUE	160Kg-m - 1600 Nm	-----
THRUST	-----	80 Kg / 800 N
STROKE	-----	60 mm
OIL + CAPACITY	-----	Transformer Oil IS - 335 (4.8 Liters)
RATED VOLTAGE	-----	415 V $\pm$ 10% 50 Hz 3Ph AC
CURRENT	-----	0.9 Amps ($\pm$ 2%)
INSULATION	-----	F Class
INGRESS PROTECTION	-----	IP - 65 IS/IEC 60529 (2001)
AMBIENT TEMP	-----	50° C
POWER	-----	380 Watt
WEIGHT	133 Kg	24 Kg

* Non-Standard voltages available on enquiry

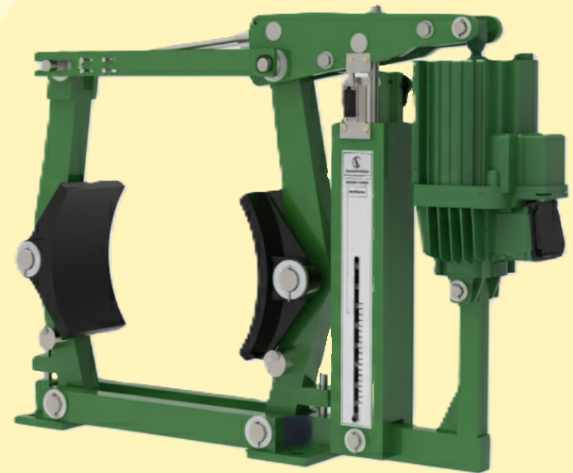

SELECTION OF BRAKE SIZE

SMG Thruster brakes are steel fabricated frames with Eldy Thruster as per din standard.


Excellent designs & good manufacturing process ensure a reliable product.

The brake torque must be $\geq$ than motor full load as referred with drum. Formula as below:


$$T = \text{Torque in Kgm} = \frac{716 \times \text{Hp}}{\text{rpm}}$$

$$T = \text{Torque in Nm} = \frac{9552 \times \text{Kw}}{\text{rpm}}$$

Where Hp/Kw = motor output & rpm = Rev/minute

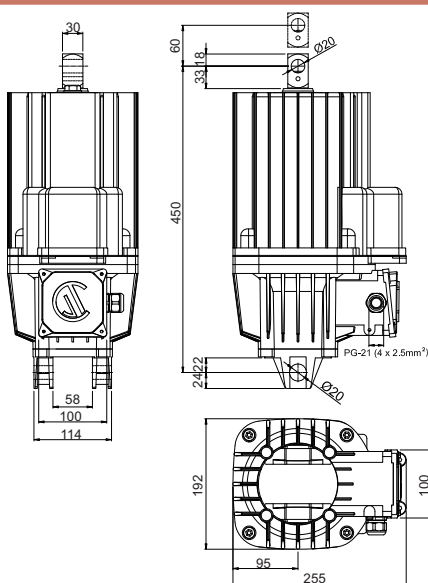

ELDY 80-06

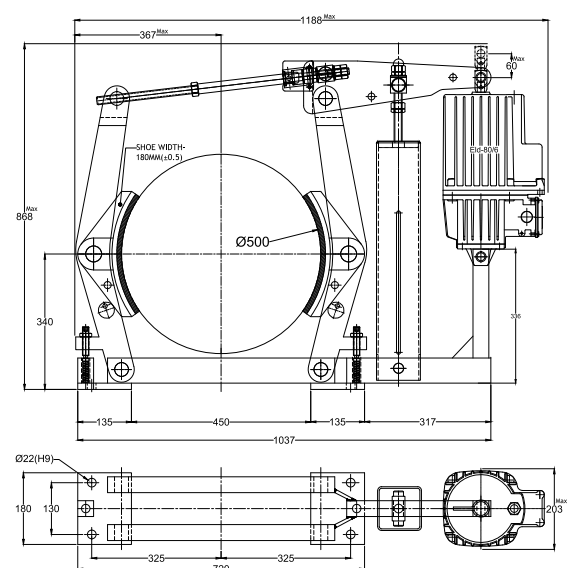

SMG-500-80/06-STD-GA1

H. O. Unit - I : C-15/16, Nand Jyot Industrial Estate, Andheri-Kurla Road, Mumbai - 400072,
Tel : (022) 42469700/730
E-mail : sales@socgroup.in

Unit - II : Plot No. 4912, G. I. D. C., Phase IV, Vatva, Ahmedabad - 382445
Tel.: (079) 68169700/702/712
E-mail : enquiry2@socgroup.in

Visit us at :
www.speedocontrols.com
www.socremote.com
www.socjoystick.com

SPEED-O-CONTROLS PVT. LTD.
CRANE CONTROL GEAR